

VELVET Mini Power 1 Studio IP51



Ref.: VMP1ST

Datasheet: June 2021 / Page 1

Bicolor dustproof compact panoramic concentrated light LED panels

[Click here for more product information](#)

VMP1ST includes: on board AC PSU with AC In & Out PowerCon TRUE1, DMX In & Out XLR-5, 1x yoke with 28mm junior pin - 16mm baby receiver. 3,5mts power cable with aerial PowerCon TRUE1



1. Power switch
2. PowerCon TRUE 1 AC Power In
3. PowerCon TRUE 1 AC Power Out
4. +/- Adjustment buttons
5. 3200K / 5600K Quick access button
6. Mode selection button (Dimmer / Colour Temperature)
7. Digital display
8. XLR-5 DMX RDM In connector
9. XLR-5 DMX RDM Out connector



VELVET Mini Power 1 Studio IP51




Ref.: VMP1ST

Datasheet: June 2021 / Page 2

| | |
|-----------------------------------|---|
| COLOUR TEMPERATURE | adjustable from 2700K to 6500K in 100K steps |
| LIGHT INTENSITY | dimnable 0 to 100, smooth and flicker-free |
| TLCI INDEX | 95 at 3200K and 98 at 5600K |
| DIMENSIONS | 385 x 190 x 90 mm (panel) 450 x 275 x 90 mm (panel + yoke) |
| WEIGHT | 2.2 kgs / 4.8 lbs (panel) 2.5 kgs / 5.5 lbs (panel + yoke) |
| POWER DRAW | 70 W |
| POWER SUPPLY | 90-264 VAC 50/60Hz through PowerCon TRUE1 in&out |
| BEAM ANGLE | 35° |
| PHOTOMETRICS | 5000 lux / 463 fc at 1m / 3 feet 600 lux / 55 fc at 3m / 10 feet |
| LED RATED LIFE | more than 50.000 hours |
| POWER CONNECTION | PowerCon TRUE1 in&out |
| DMX | DMX-RDM with XLR-5 in&out connectors |
| OUTPUT FREQUENCY | 16KHz flicker-free up to 2000fps |
| OPERATION TEMPERATURE | from -20°C to +40°C |
| COOLING | no-noise, fan-free passive cooling |
| PROTECTION | IP51 dustproof, indoor or outdoor protected use |
| VELVET LED TECHNOLOGY | selected BIN high-power LED+custom optics+optic diffuser+CPU software control |
| RIGGING OPTIONS | aluminum yoke with 16 baby receiver combined with 28 junior pin, multiple ¼-20" rigging points, multipanel yokes, pole-operated studio yoke |
| QUICK MOUNTING ACCESSORIES | Quarter, half and full hard diffusion, foldable Snapgrid, removable barn doors, remote control, hard case |
| CONSTRUCTION & FINISH | Made of black powdercoated extruded and sheet aluminum |

WIRE VIEW

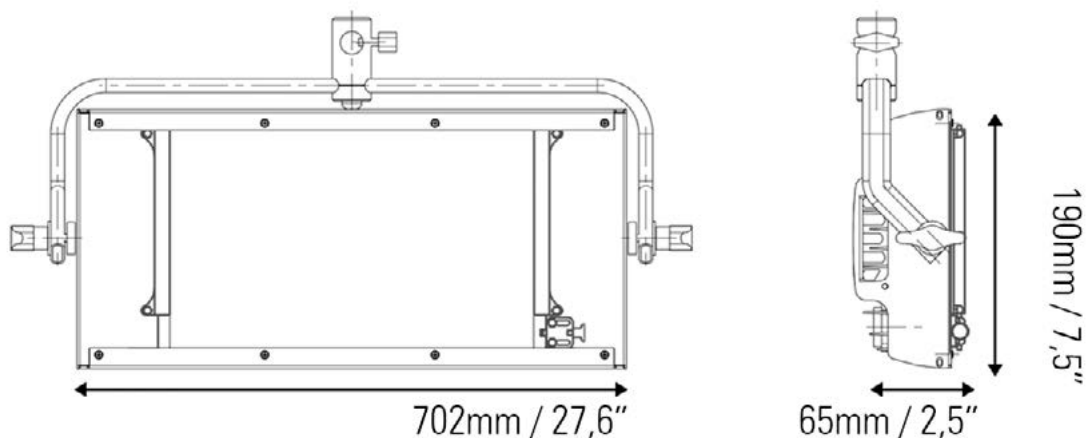





VELVET Mini Power 1 Studio IP51




Ref.: VMP1ST

Datasheet: June 2021 / Page 3

PHOTOMETRICS

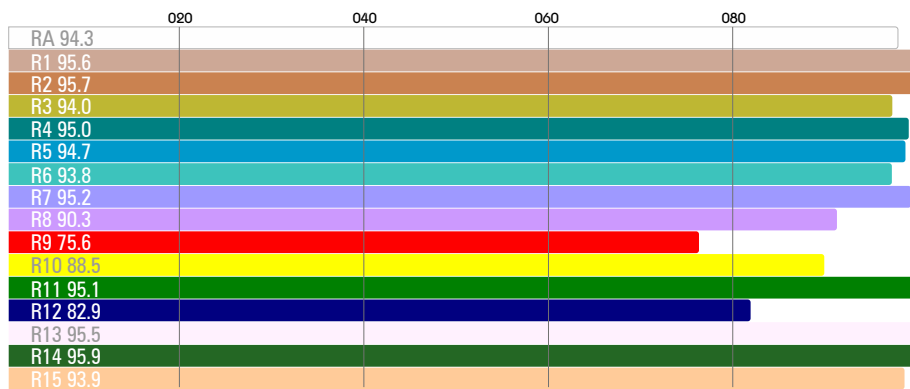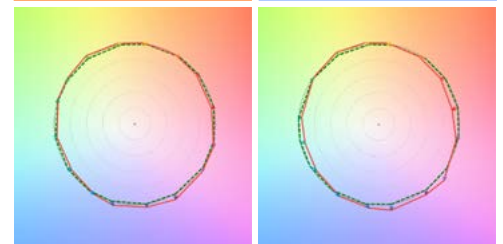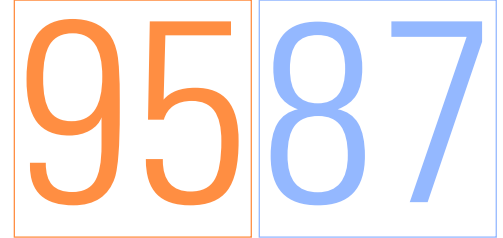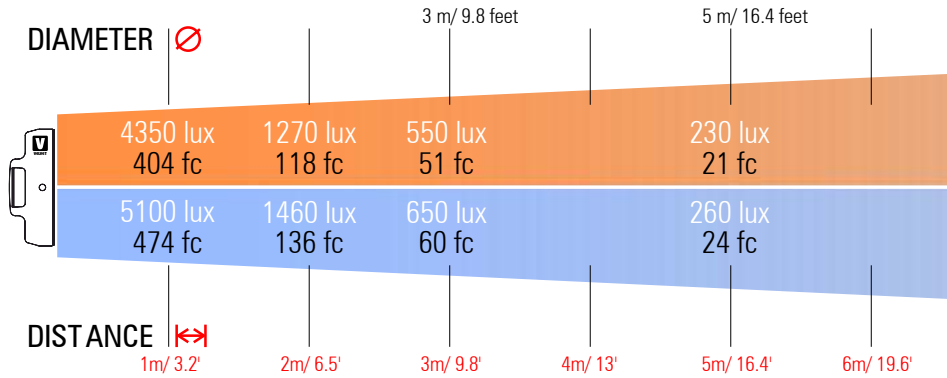

CCT 3294K

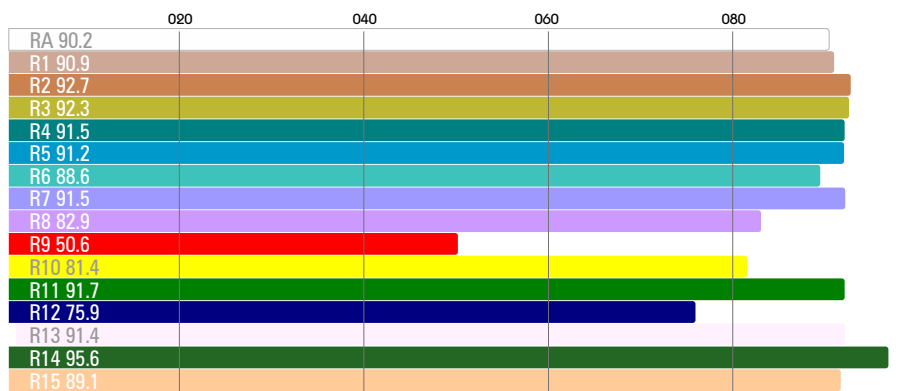

CCT 5644K

VELVET Mini Power 1 Studio IP51




Ref.: VMP1ST

Datasheet: June 2021 / Page 4

ACCESSORIES

BEAM CONTROL



VMP1-D25



VMP1-D50



VMP1-D100



VM1-RB



VM1-SG

TRANSPORT



VM1-BAG



VM1-DBAG

REMOTE CONTROL



VL-RC