



VELVET Mini Power

Beaming Weatherproof Panoramic Panels



35°

Concentrated Beam


made to last

VELVET Mini Power

Weatherproof, rugged and powerful

LONG THROW BEAM

Punchy 35° beam to light at long distances, powerful enough to be bounced or diffused

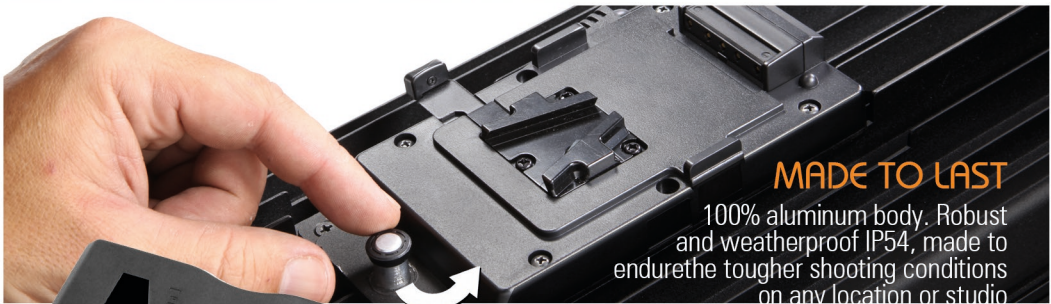

Mini 2 REMOVABLE BATTERY MOUNT

On board quick link Vlock / Gold battery mounts

SMART AC/DC POWERED

VELVET Mini panels are always ready to operate worldwide
With any battery 12 to 35 VDC through XLR-3 connector ◀
With Smart Vlock 90-264V AC adapter ◀

Made to last

Portable and always ready to rig



QUICK SETUP



On-board user friendly digital display with shock-resistant buttons with dedicated 3200K/5600K quick-access button.

- ▶ Easily removable yoke with a 16mm (5/8") baby receiver 28mm (1.1/8") junior pin
- ▶ Silent fan-free operation with efficient passive cooling
- ▶ 4 sliding 1/4" threads for rigging on top & bottom
- ▶ DMX RDM with XLR-5 IN connector
- ▶ Two handles to be easily hand-held



Accessories


A growing Ecosystem

POWER OPTIONS

VLOCK GOLD



IP51 BASEPLATE

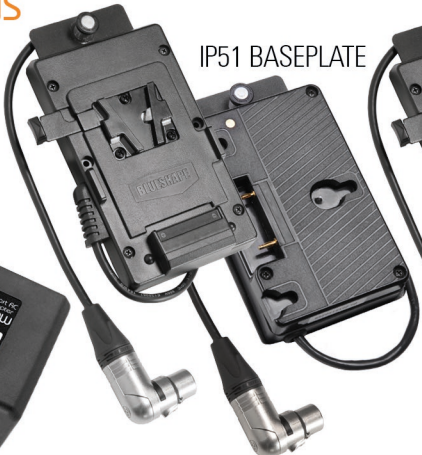

IP54 BASEPLATE



LIGHT BEAM CONTROL



DIFFUSION FILTERS

SNAPGRID

SNAPBAG

BARNDOORS

DMX CONTROL



VELVET REMOTE

CINELEX WIRELESS SYSTEM

BAGS




the most versatile LED panel

VELVET Mini Power

Mini 1 Power 70W



Mini 2 Power 120W

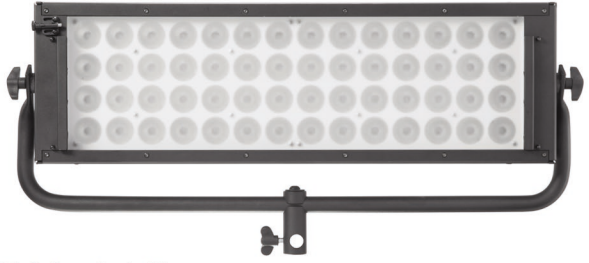

LOCATION WEATHERPROOF IP54 ☼



STUDIO DUSTPROOF IP51

technical specifications

DIMENSIONS & WEIGHT Mini 1 POWER
345 x 190 x 90 mm / 13.6 x 7.5 x 3.5"
2 Kg / 4.4 lbs

DIMENSIONS & WEIGHT Mini 2 POWER
607 x 190 x 90 mm / 24 x 7.5 x 3.5"
3 Kg / 6.5 lbs

POWER DRAW Mini 1 POWER
70W / 0.63 Amps at 110 VAC

POWER DRAW Mini 2 POWER
120W / 0.92 Amps at 110 VAC

POWER SUPPLY
90-264 VAC through Vlock/Gold battery
quick link mount
12-35 VDC 50/60 Hz through the Smart
Vlock/Gold AC adapter

DIMENSIONS & WEIGHT Mini 1 POWER STUDIO
385 x 190 x 65 mm / 15.5 x 7.5 x 3.5"
2.2 Kg / 4.8 lbs

DIMENSIONS & WEIGHT Mini 2 POWER STUDIO
670 x 190 x 90 mm / 27.6 x 7.5 x 3.5"
3.3 Kg / 7.2 lbs

POWER DRAW Mini 1 POWER STUDIO
70W / 0.63 Amps at 110 VAC

POWER DRAW Mini 2 POWER STUDIO
120W / 0.92 Amps at 110 VAC

POWER SUPPLY
Integrated 90-264 VAC, 50/60 Hz through
PowerCon TRUE 1 IN/OUT

photometrics

VELVET Mini 1 POWER / Mini 1 POWER STUDIO
5000 lux / 463 fc at 1 m / 3 feet
600 lux / 55 fc at 3 m / 10 feet

VELVET Mini 2 POWER / Mini 2 POWER STUDIO
9000 lux / 833 fc at 1 m / 3 feet
1200 lux / 110 fc at 3 m / 10 feet

BEAM ANGLE 35°

COLOUR TEMPERATURE Adjustable from 2700 K to 6500 K in 100 K increments

LIGHT INTENSITY Dimmable 0 to 100% (Smooth & flicker-free)

COLOR RENDERING INDEX 95 CRI typical, 90 CRI minimum

OUTPUT FREQUENCY over 1000 fps

DMX CONTROL DMX-RDM via XLR-5 pin connector

CONSTRUCTION AND FINISH Black anodized extruded aluminum and black powder coated sheet aluminum

RIGGING OPTIONS Aluminum yoke with 16mm baby receiver / 28mm junior pin, four sliding threads 1/4" for riggings located on panel sides

QUICK MOUNTING ACCESORIES Quick link Vlock or Gold battery mount, Smart VlockAC power adapter, foldable Snapgrid, foldable Snapbag diffuser, removable barndoors



EVERYWHERE
Mini Series


Natural VELVET beauty light

Weatherproof IP54
100% Aluminum housing
32K/56K Quick access button
DMX-RDM Master/Slave

Silent fan free
Fast setup and adjustment
Vlock/Gold quick on-board mounts
Smart Vlock/Gold AC adapters

Affordable European quality with 2 years warranty. 100% made & designed in Barcelona (Spain)

Intellectual Property. VELVET Lights' technology is protected under Spanish patents and international patents pending

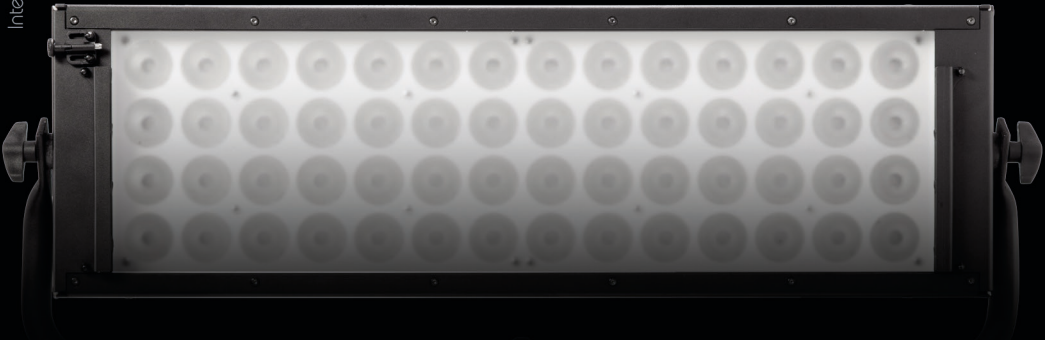

VELVET Mini Power

velvetlight.tv

2018 Copyright VELVETLight. All rights reserved